

# Product Data Sheet

## Knauf Fill & Finish 60 Premium



**Knauf Fill & Finish 60 Premium is a fast setting (60 minute) multi-purpose gypsum based compound for bedding tapes and beads, as well as the finishing coats of the jointing process. For hand application. Up to a Q2 finish.**

### Areas of Application

For jointing gypsum boards. For bedding joint tapes and finishing joints by hand application only.

### Key Benefits

- 60 minute working time
- 9 month shelf life

### Compliance Standards

EN13963. Type 3B

### Performance Data

Reaction to Fire (R2F)	Flexural Strength (F)	Dangerous Substances (DS)
A1	NPD	NPD

### Technical information

Weight (kg)			
Colour	Weight	Approximate Coverage	Material Number
Off White	10	45m <sup>2</sup> per 10kg bag*	622332

\*Based on filling application to tapered edge board

## Sustainability

### Substances of very high Concern (SVHC)

At the time of publication, under REACH UK and REACH EU regulations this product contains no SVHC. For more information please consult the Safety Data Sheet.

## Storage and Handling

Store in a dry area, protected from frost, high temperature and exposure to direct sunlight. Storage and application temperature to be above 5°C.

## Packaging

Paper sack with an inner plastic layer for protection.

## Shelf Life/Service Life

9 months.

## Disposal/Repair

Dispose of contents/container in accordance with licensed collectors sorting instructions.

## Health & Safety

Use of protective gloves, glasses and a face mask is recommended due to dust. Avoid prolonged contact with the skin. Refer to the safety data sheet for more information.

## Application / Installation

Add the powder to cold, clean water (6.8L/10kg bag) in a suitable clean mixing container. Mix to workable consistency.

Once mixed, the product remains usable for 60 minutes. Paper Joint tape is recommended to be used and bedded with Knauf Fill & Finish 60 Premium, followed by a finishing coat once dry.

If sanding is required, at least 120 grit sandpaper is recommended. Once the jointing is completed and dry, a coat of Knauf Wallboard Primer or Knauf Plasterboard Sealer should be applied before decoration. For detailed application advice, consult BS 8000-8 2023.


## Additional Documentation

[Declaration of Performance UKCA](#)

[Declaration of Performance CE](#)

[Safety Data Sheet](#)

Datasheet for Indoor Air Quality available on request.

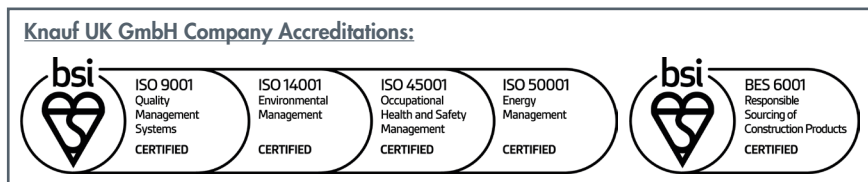

### Customer Service

UK Tel: 0800 521 050  
Eire Tel: 01 4620739  
Email: [cservice@knauf.com](mailto:cservice@knauf.com)

### Technical Service

0800 521050 (option 2)  
Live Webchat 09:00 -17:00  
[technical-uk@knauf.com](mailto:technical-uk@knauf.com)

### Website

[www.knauf.co.uk](http://www.knauf.co.uk)  
[www.knauf.ie](http://www.knauf.ie)

### Address (UK)

Knauf  
Kemsley Fields Business Park  
Sittingbourne  
Kent ME9 8SR

### Address (Ireland)

Knauf  
87 Broomhill Road  
Tallaght  
Dublin 24  
D24 WR85

KML100452

The information given in this publication is believed to be current and accurate as at the date of publication, but no warranty, express or implied is given. Updates will not be automatically issued.

© Copyright Knauf 2023

Creation Date: 02/11/2023  
Revision Reference: 001  
Revision Date: 02/11/2023